

## KADO CLEAN PROFESSIONAL UO-S4 4" REVERSE OSMOSIS SYSTEM

### APPLICATIONS

Steam boilers, heating and cooling circuits, breweries and beverage production, livestock and poultry farms, glazing factories, laundry and car wash etc.

### EQUIPMENT

- Grundfos® CM 3-14 pump
- 300 psi membrane vessels
- BB20 sediment prefilter
- Electrical panel with Eco UO 1 Controller
- Danfoss solenoid valves
- Piping, instrumentation
- Steel frame
- Wooden crate

### KEY FEATURES

- ECO UO 1 Controller
- Easy to use thanks to smart architecture
- Universal system construction allows connecting options of permeate flushing and raw water blending
- Grundfos worldwide guaranty
- CE marked and confirmed to be safe in accordance with EC New Approach Directives

### OPTIONS

- Filmtec™ XLE-4040 / LCLE-4040 or ELP-4040 membrane Dosing pump for antiscalant
- Versatile set for raw water blending (120...1080 L/h) or permeate flushing

### PHYSICAL PARAMETERS

Influent water, concentrate, permeate	G 1"
Antiscalant dosing port	G ½"
Permeate flushing input port	G 1"
Raw water blending port	G ¾"
Approx. weight (bare system / crate)	110 kg      150 kg
Dimensions (bare system, W × D × H)	0.70 × 0.60 × 1.50 m
Dimensions (crate, W × D × H)	1.00 × 0.75 × 1.90 m



*Ecosoft reserves the right to amend the product's system architecture provided that its functionality and usability will not deteriorate*

### KADO CLEAN PROFESSIONAL UO S4 4" REVERSE OSMOSIS SYSTEM

Code	Product	Flow rate, L/h (GPH)	Membranes	
UO24000TP5	KADO CLEAN PROFESSIONAL UO S4	1000–1200 (250–330)	4/40 × 40	1


## TECHNICAL SPECIFICATION

Permeate capacity <sup>1</sup>	1000 L/h
Permeate recovery <sup>2</sup>	75%
Maximum TDS	3000 mg/L
Influent flow demand	1300...1500 L/h (service) 3000...4000 L/h (rinse)
Operating pressure	8...12 bar
Maximum pressure	14 bar
Electrical requirements	230 V, 50 Hz (1 ph)
Electrical power	2.0 kW
Pre-filter rating	5 µm

<sup>1</sup> depends on feed water TDS, temperature, and permeate recovery — see graph on the right

<sup>2</sup> for low scaling/fouling water

## KADO CLEAN UO S4 FLOW CAPACITY (WITH XLE-4040 MEMBRANES)

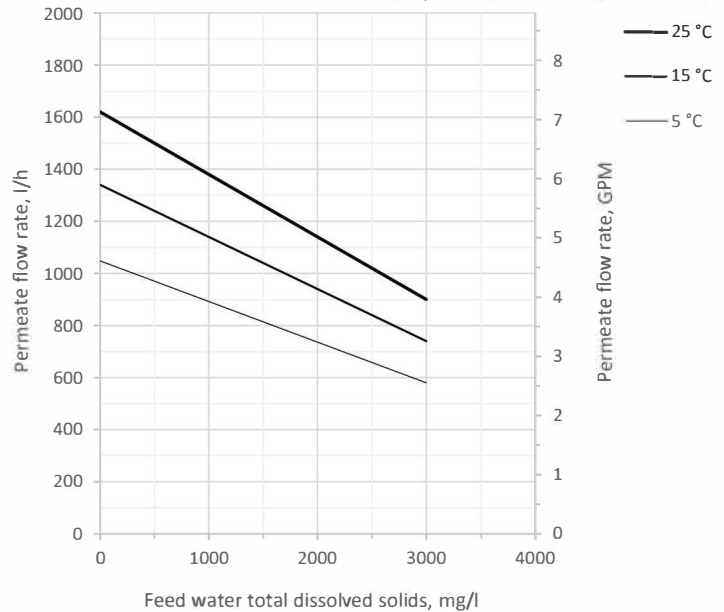

Permeate flow rates are calculated under the following conditions:  
 • 2 bar influent water pressure  
 • 0 bar backpressure in the permeate line  
 • fresh membranes  
 • XLE-4040 membranes

## PIPES AND INSTRUMENTS DIAGRAM

